

## All Hazard High-Power Siren System

**Whelen's VORTEXR4 Series All Hazard High Power Sirens provide an economical alternative for powerful siren communication without compromising quality.**

### SYSTEM FEATURES

- VORTEXR4 - Speaker with Four Speaker Cells Active
- Two Compartment (Type I) Natural Finish Aluminum Cabinet
- 129dBC @ 100'
- VORTEXR4 Speaker Includes Four High Efficiency 400 Watt Speaker Drivers
- 50' Cable Included
- Battery Powered, Minimum of 15 Minutes of Full Power Output with Batteries of Our Recommendation
- AC Temperature Compensated 5 Amp Battery Charger
- Local Controls or Remote Controls
- Four Tone-Only Power Amplifiers
- Gear Driven Rotor
- Electronic Siren Controller
- Tone Generator
- Timer
- Local Control Push Buttons
- Rotor Relay Control
- SI TEST®
- Low Battery Alarm
- Battery Tray
- Lightning Arrestor
- Six Standard Public Warning Tones - Wail, Whoop, Attack, Hi-Lo, Alert, Airhorn

### SYSTEM OPTIONS

- VSBC80 - Solar Power ❶
- BSETVOR - 2ea Whelen Approved Batteries
- VPTB - Speaker Pole Top Bracket
- Alternate Tone Set

#### NOTES:

- ❶ Solar power option. 2 - 80 watt panels, mounting bracket and regulator..

### SIREN ACTIVATION CONTROLS

Our VHF High and UHF siren activation control packages include the following:

- Radio
- Radio Interface
- Tone Squelch
- 2-3dB Gain Omni-Directional Antenna with Bracket
- 35' of RG58 Antenna Cable
- Polyphaser
- SI TEST®

Other features are dependant upon one or two-way controls. Whelen equipment can be interfaced with many different types of two-way radio communications products and systems including 800Mhz trunking, Motorola's MOSCAD, FSK, Narrow-Band and VHF Low Band. The following is available as standard options. Contact factory for special applications.



VORTEXR4 cell speaker housing mounted on rotor.

### ONE-WAY CONTROLS

- VAUXIN - Auxiliary Board for Contact Closure Activation
- VD2020LL - 10 Digit DTMF Landline Activation
- VD2020H - 10 Digit DTMF VHF High Band / 150-170 Mhz
- VD2020U - 10 Digit DTMF UHF / 450-470 Mhz
- VORTT - Two-Tone Sequential Option

### TWO-WAY CONTROLS

- VAUXCS - Two-Way Contact Closure Activation and Status Board
- VC2020LL - Two-Way Landline Activation
- VC2020H - 10 Digit DTMF VHF High Band / 150-170 Mhz
- VC2020U - 10 Digit DTMF UHF / 450-470 Mhz
- VC2020NH - 10 Digit DTMF VHF High Band Narrow-Band
- VC2020NU - 10 Digit DTMF UHF Narrow-Band

#### Options:

- VFSKXMOD - Converts the Siren Activation Controls to FSK Format
- VSTATUS - Cabinet Window LED Status Indicator
- VPGINT - Paging Interface to Interface Whelen Tones with Existing Paging Systems
- VINTRU - Intrusion Alarm (available with two-way only)



TYPE I ELECTRONIC CABINET (with service door open shows control panel and battery tray with optional batteries).

# VORTEXR4

## Specification Data



Component	Height Inches (CM)	Width Inches (CM)	Depth Inches (CM)	Weight Lbs. (kg)
VORTEXR4 Speaker & Rotor	49.0 (124.5)	28.5 (72.4)	56.0 (142.2)	234 (106.1)
Electronics Cabinet - Type I	32.5 (82.6)	22.5 (57.2)	10.5 (26.7)	83 (37.7)*
Pole Top Bracket (Optional)	30.0 (76.2)	12.0 (30.5)	10.0 (25.4)	71 (32.3)

\* Less batteries. Two batteries, Delco DC74, add 90 Lbs. (40.9kg)

**WHELEN**<sup>®</sup>  
ENGINEERING COMPANY, INC.  
PUBLIC WARNING PRODUCTS

Route 145, Winthrop Road  
Chester, Connecticut 06412-0684  
(860) 526-9504  
1-800-637-4736  
Fax: (860) 526-4784  
Internet: [www.whelen.com](http://www.whelen.com)  
e-mail: [iowsales@whelen.com](mailto:iowsales@whelen.com)

Whelen Engineering Company, Inc. reserves the right to upgrade its products with design improvements without notification. Tornado photo courtesy NOAA/NSSL.  
© 2006 Whelen Engineering Company, Inc. Printed in the U.S.A.  
041806-11358C



Pole Top Bracket (Optional VPTB)

### ELECTRICAL

- **Battery charger input:** 120VAC, 60Hz, 7A Fuse
  - **Battery charger output:** 28VDC, 5A#
  - **Batteries:** 2-12V, 60AH Lead Calcium (user supplied)
  - **Standby current:** 40mA,
  - **Rotor motor:** <1A, 24VDC
  - **Operating current:** 88A, 24VDC
  - **Power amplifier output power:** 1600 Watts
- # UL recognized component

### ENVIRONMENTAL

- **Operating Temperature:** -35C to +60C
- **Storage Temperature:** -65C to +125C
- **Humidity, Non Condensing:** 0 to 95%

### ORDERING INFORMATION

**BASIC SYSTEM INCLUDES ALL OF THE FOLLOWING:**

- **VORTEXR4** - Speaker Assembly & Electronics Cabinet
- OPTIONS:**
- **VAUXIN** - Auxiliary Board for Contact Closure Activation
  - **VAUXCS** - Auxiliary / Status Control Board for Contact Closure Activation and Status
  - **VD2020LL - VD2020H, VD2020U** - One-Way Radio Control ❶
  - **VC2020LL, VC2020H, VC2020U** - Two-Way Radio Control / Status Monitoring, COMM/STAT™ ❶
  - **VC2020NH, VC2020NU** - Two-Way Narrow-Band Radio Control / Status Monitoring, COMM/STAT™ ❷
  - **VORTT** - Two-Tone Sequential
  - **VFSKXMOD** - FSK Format
  - **VSTATUS** - Cabinet Window LED Status Indicator
  - **VPGINT** - Paging Interface to Interface Whelen Tones with Existing Paging Systems
  - **VINTRU** - Intrusion Alarm
  - **VSBC80** - Solar Power ❷
  - **VPTB** - Speaker Pole Top Bracket
  - **BSETVOR** - One Pair of Batteries

**NOTES**

- ❶ 10 digit DTMF Controls • Landline • VHF High Band/150-170 Mhz • UHF/450-470 Mhz  
Our VHF High and UHF siren activation control packages include tone squelch, radio, radio interface, 2-3dB gain omni-directional antenna with bracket, 35' of RG58 antenna cable and polyphaser.
- ❷ Solar power option includes 2 - 80 watt panels, mounting bracket and regulator
- ❸ Contact Factory

### Acoustic Performance


SPL @ 100': 129dB

Estimated 70dB range: 6,000'

Estimated 60dB range: 12,000'

Note: 100' performance levels listed represent repeatable results within +/-2dB to stated levels.

Estimated 70dB perimeter is based on the Federal Emergency Management Agency's (FEMA) -10dB per distance doubled path model.

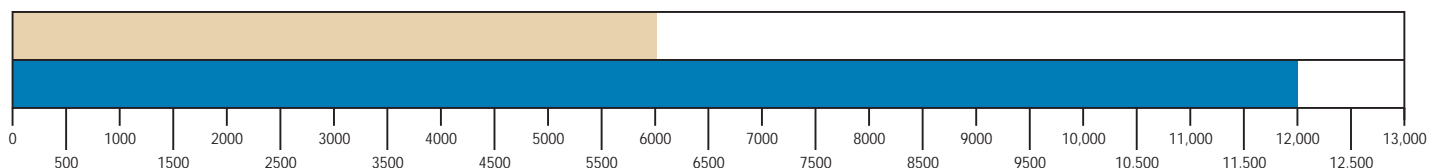

**MID-STATE COMMUNICATIONS**  
[www.midstatecomm.com](http://www.midstatecomm.com) 800-926-7277